

insight
unleashed



 **quickview**[®]
airHD

an instant,
wireless view
into any sewer

Envirosight



sewer assessment that unleashes your insight

A complete sewer assessment is essential to prioritizing CCTV and maintenance activities, planning cleaning and rehab work, and meeting regulatory obligations.

Quickview airHD makes it easier, faster and more affordable to assess sewer condition, offering productivity features like:

- HD video
- wireless operation
- touchscreen controls
- motorized tilt
- hands-free stability
- remote centering



Quad Haloptic. Our patented Haloptic technology gives you more illumination farther into the pipe with optimum alignment at every distance. The new Quad Haloptic configuration uses four offset reflector/lamp pairs to fully encircle the camera with powerful light.

HALOPTIC

Smart Center. To adjust camera height in-manhole, push against the standoff's gas spring to the desired height; a ratchet then holds your position.

Wi-Fi. Wireless control and video eliminates cables and allows live video sharing on multiple devices.

Connection. Connect to any Quickview airHD in range, either in control or view-only mode. Download app updates to access new features.

Status Bar. Monitor illumination, zoom and tilt, as well as Wi-Fi signal and battery (for both tablet and camera).

Capture. Record video and capture still images to the media library.


HD Zoom

Tilt

Illumination

camera

controls

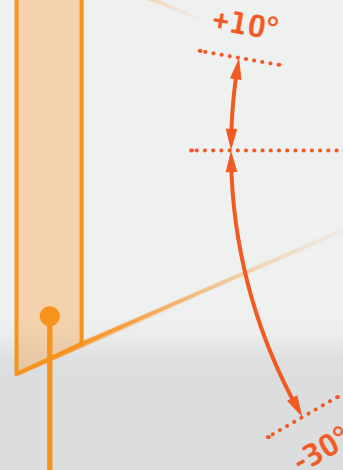

©2016 EnviroSight, LLC. All rights reserved. Specifications subject to change without notice. The Quickview, EnviroSight and Haloptic names and logos are trademarks of EnviroSight. Patents 6,538,732 and 7,009,698; others pending.

Text Overlay. Configure on-screen display of text, including variables like zoom, tilt and GPS coordinates. Modify text color and position.

Media Library. Browse media thumbnails, then review, annotate and share footage.



system components

- camera head
- pole
- standoff
- bipod
- battery (2)
- battery charger
- case
- app (tablet device not included)



www.envirosight.com

(866) 936-8476 • (973) 252-6700

111 Canfield Ave., Unit B3
Randolph, NJ 07869

specifications

video system

imager 1/2.8-type CMOS
 zoom 360× (30× optical, 12× digital)
 resolution 1280×720 pixels (2.38 megapixels)
 functions ZOOM
 focus (auto/manual)
 shutter (auto/manual)
 sensitivity mode
 field of view (hor.) . . . 63.7 deg (wide) - 2.3 deg (tele)
 sensitivity 1.4 lux

illumination

system Quad Haloptic (four LED/reflector pairs)
 illumination type coaxial, collimated
 reflector type proprietary

camera head

connections 4-pin auxiliary port
 depth rating 10' (3m)
 construction aluminum, rubber, acrylic
 sensors temperature, pressure, incline

wireless system

Wi-Fi standard IEEE 802.11b/g/n
 frequency range 2.400–2.483 GHz
 operating channels 1–11

centering support

extension range 18.9" (480mm)
 pipe diameter compatibility . . . 6–48" (DIN 150–1200)
 mechanism . . . gas spring with reciprocating ratchet

battery/charger

battery quantity 2
 battery capacity 3.4 A-hr.
 battery charger mains power

pole/bipod

length (collapsed/extended) 4'/16' (nominal)
 stabilization detachable hands-free support

app

supported OS Android, iOS, Windows

worldwide sales, service and support offices